
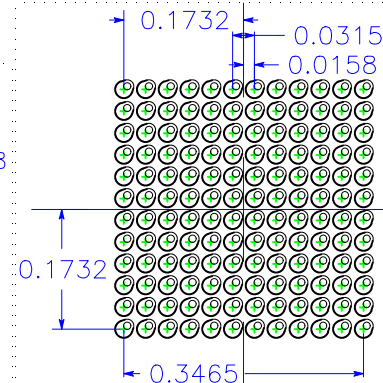


1.00, 0.80, and 0.65 mm PITCH:
LOAD BOARD PAD

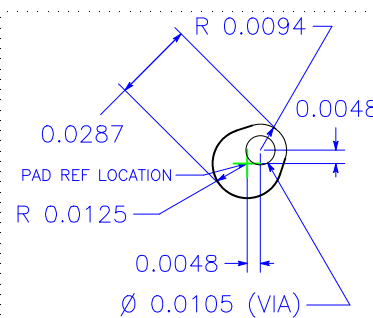

NOTES:

- 1) LOAD BOARD PLATING; SEE JTI LOAD BOARD PLATING SPEC LIT1009
 - 2) THREADED INSERT TO BE SUPPLIED BY LOAD BOARD MANUFACTURER
 - 3) NICKEL AND GOLD PLATING GENERAL SURFACING REQ. MUST MEET ANSI/IPC-A-600E, SECTION 2.7.1.
 - 4) NICKEL PLATING MINIMUM PLATING THICKNESS OF 200 μ INCH/5 μ m THICK.
 - 5) NICKEL PLATING MUST MEET QQ-N-290A, CLASS1, GRADE G.
 - 6) GOLD PLATING MUST MEET MIL-G-45204C, TYPE I (99.7% GOLD MIN), GRADE C (HARDNESS 130-200).
- CLASS 1 (50 μ inch/1.3 μ m THICK, MINIMUM.

PROPRIETARY INFORMATION. NO REPRODUCTION OR OTHER USE OF THIS DOCUMENT IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF AQL.

DRAWINGS ARE NOT TO SCALE.
DIMENSIONS ARE IN INCHES
TOLERANCES ARE NON
ACCUMULATIVE

TOLERANCES

X.XX \pm .010
 X.XXX \pm .005
 X.XXXX \pm .0025
 ANGLES \pm 2'



9783 S.W. COMMERCE CIRCLE WILSONVILLE OREGON, 97070
TELEPHONE (503) 682-3193

TITLE
STD ST SOCKET/LOADBOARD LAYOUT

DRAWING NO. 09XX-144-080-1010 REV

CUSTOMER CONTACT

BY PER ASSEMBLY FILE LOCATION

APPROVALS		DATE
ORIG	LARRY R RICE	11JAN01
FINAL		

FP_144-080-1010(SGS)